





UNDERCOUNTER LIGHTNING SETUP GUIDE




- **Read all the instructions before installing.**
- **Remove all packing materials before you start.**
- **This installation requires basic mechanical skills.**
- **Proper installation is the responsibility of the installer.**
- **Product failure due to improper installation is not covered under the warranty.**
- **Keep this instruction manual.**

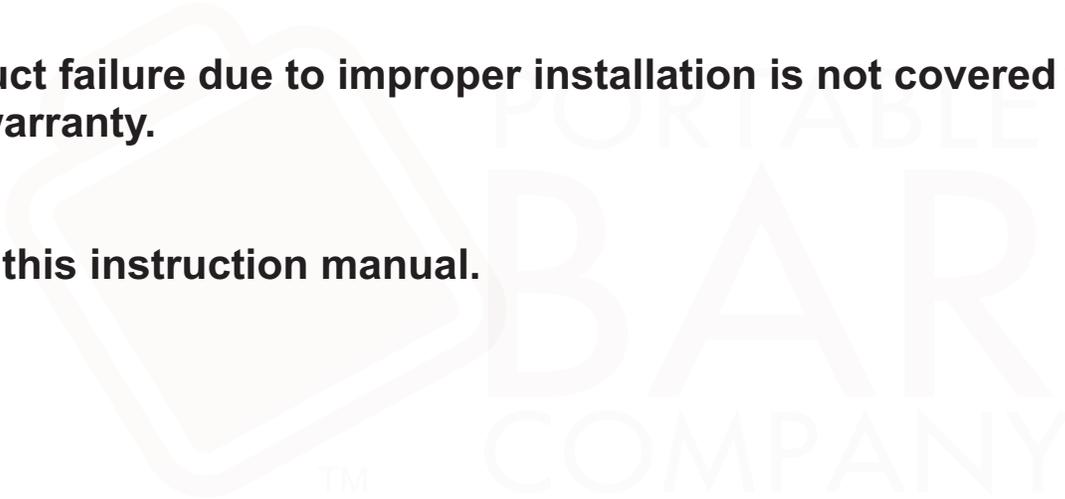


Light Bar
QTY: 3

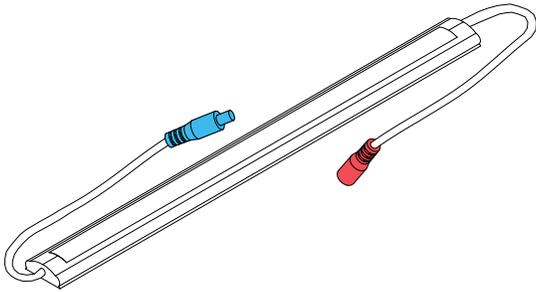


Light Dimmer and Switch
QTY: 1

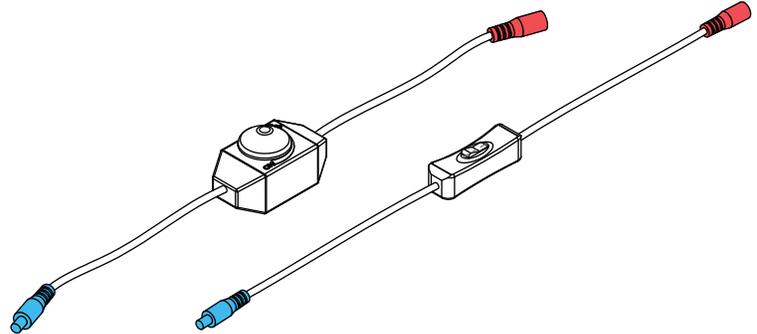


Adhesive Cable Hooks
QTY: 16




Power Adapter
QTY: 1

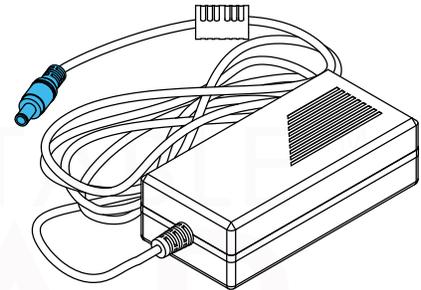

Double-sided Tape
QTY: 11

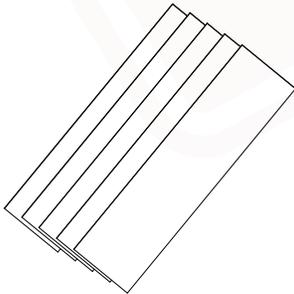

Extension Cable
QTY: 1

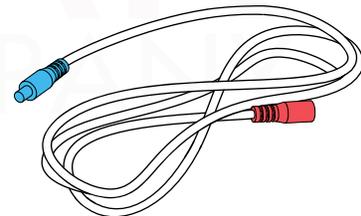

The lightning kit comes with many accesories. To properly install the lightning kit under your Flash Bar Straight Segment you will only need the components listed above.

Note: Parts are not to scale.

STEP 1: Remove all light bars from carton. Install provided double-sided tapes on the back of the light bars. Follow the drawing below:

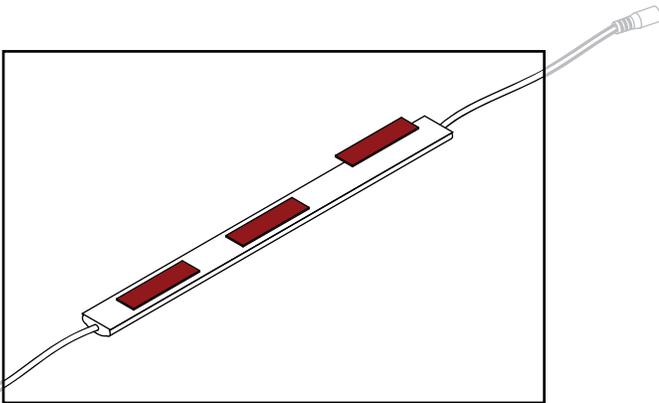


Figure 1

Note: Leave the protection film on one of the sides of the tape. Remove it when installing the light bars.

STEP 2: Remove the counter from your Flash Bar Straight Segment and place it on a flat surface.

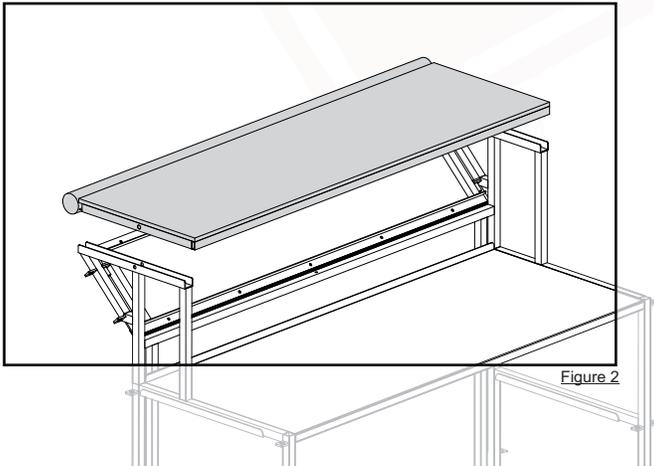


Figure 2

Steps to be continued on the next page.

STEP 3: Place counter upside down and install light bars following the drawing below:

■ Male connector

■ Female connector

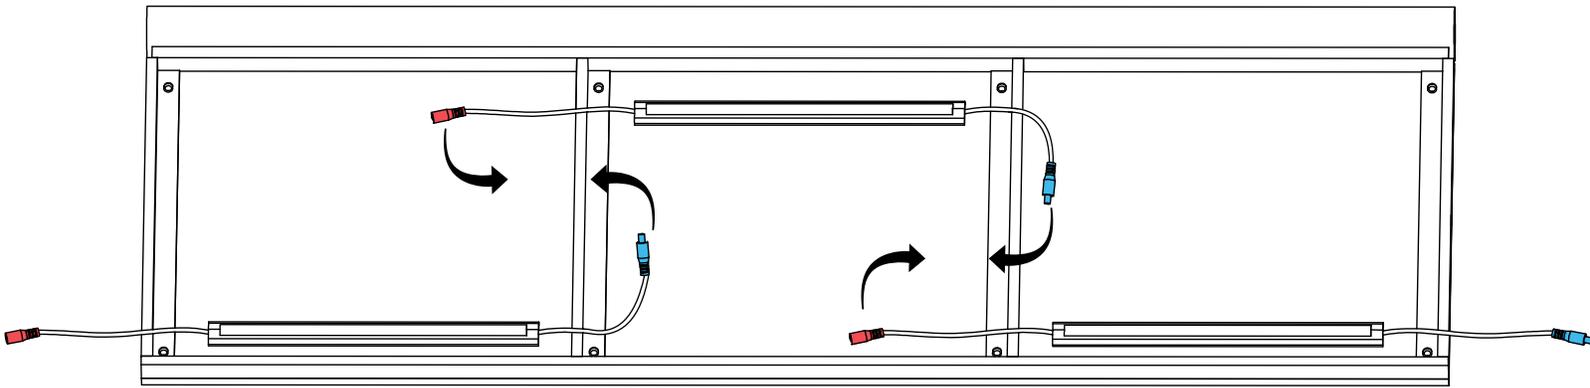


Figure 3

Note: Keep in mind the female/male connectors when installing the light bars.

STEP 4: Plug the light bars to each other. Install adhesive hooks following the diagram below. Leave the first plug to the left hanging. This connector will be plugged to the power source later on.

○ - Adhesive hook

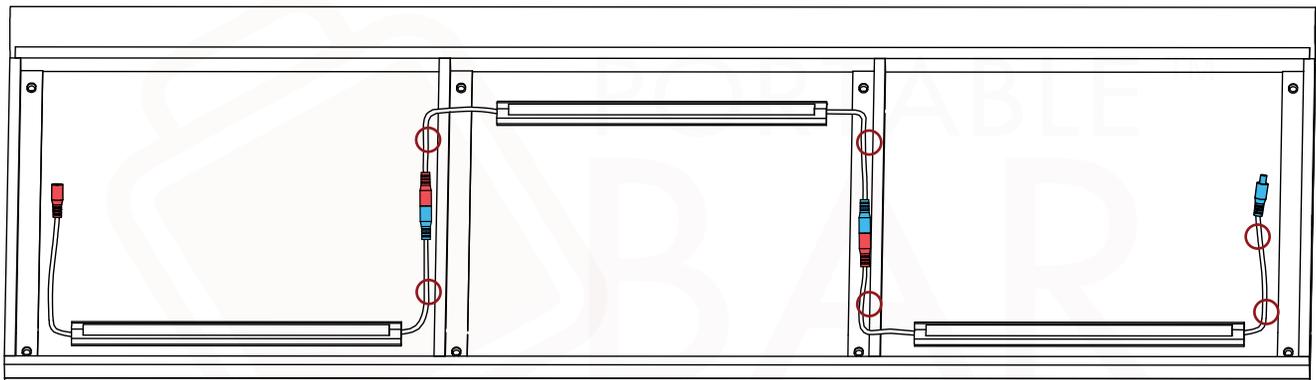


Figure 4

STEP 5: Put counter back in place onto sideframes.

STEP 6: Install your choice of light dimmer or switch (or both). These pieces come with its own double-sided tape. Place them anywhere on the highlighted zones below. Follow the connection diagram to properly plug all components.

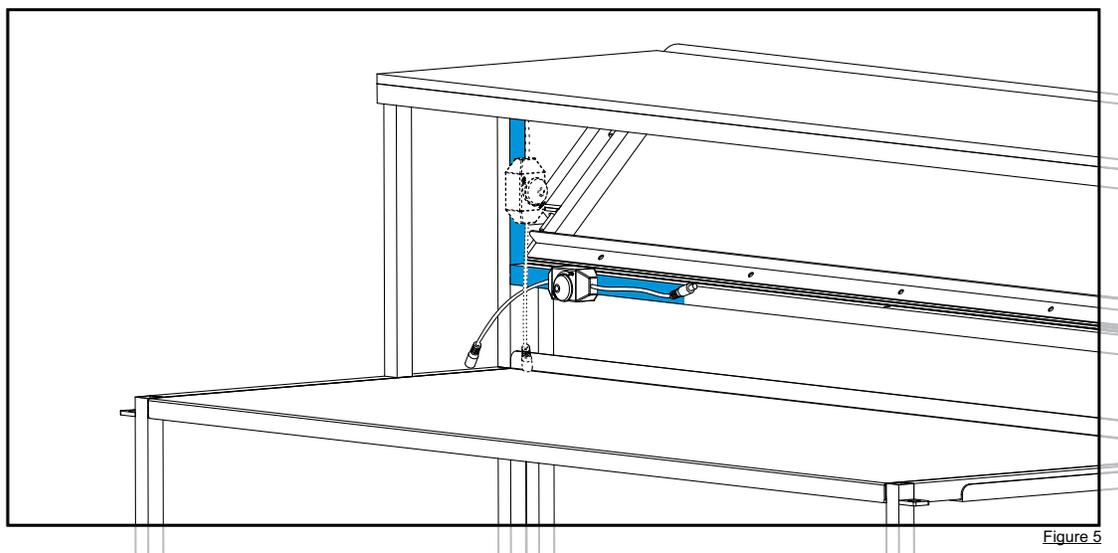


Figure 5



STEP 7: Place the power adapter on the bottom shelf and run the connecting cable on the side of the flash bar. You can also place the power adapter on the upper ACP frame underneath the counter.

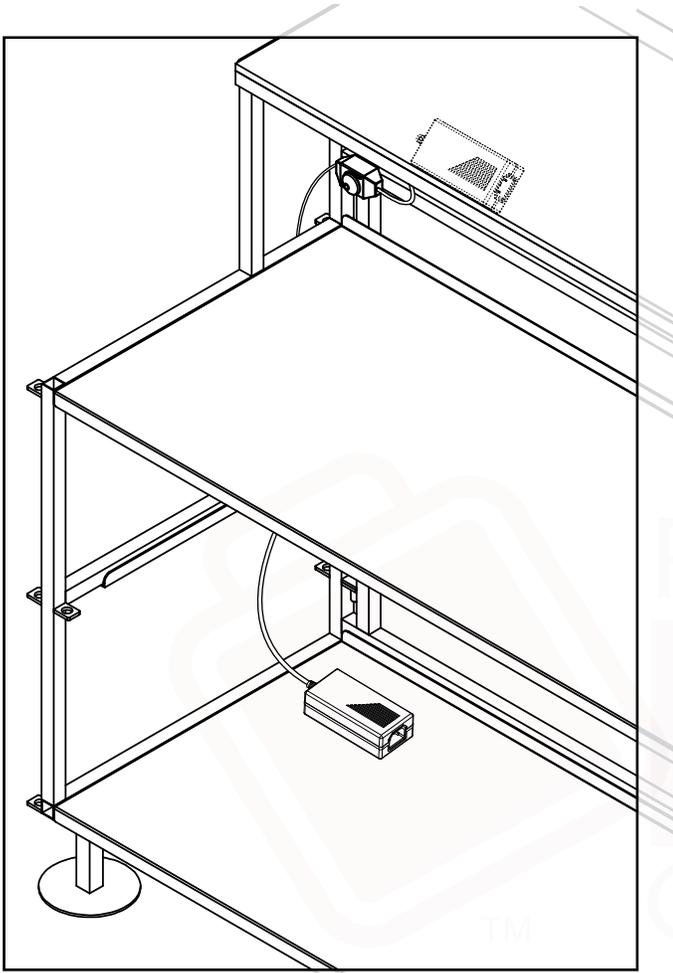


Figure 6

STEP 8: Plug power adapter to wall outlet using provided 3-prong cable.

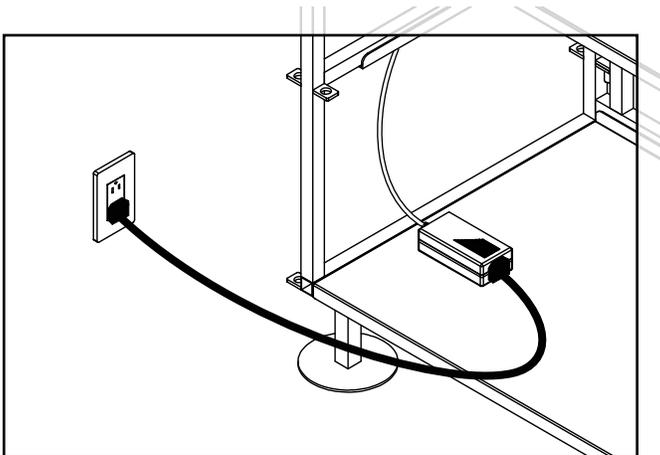


Figure 7

To connect more light bars using only one power adapter.

Note: This lightning system is capable of powering up to 6 light bars using only one power adapter, which is two straight segments.

STEP 1: Follow Steps 1 to 6 of this guide on an adjacent straight segment.

STEP 2: Connect 3rd light bar to 4th light bar on adjacent segment. If the cables are not long enough use provided extension cord.

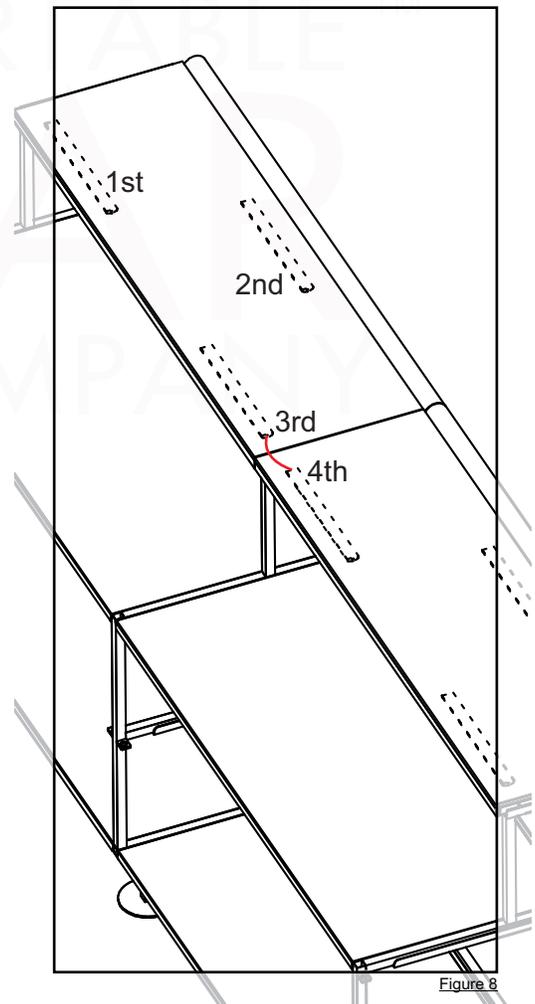


Figure 8



Contact us

Tel # 877-958-7901

Fax # 866-659-3353

E-mail: info@theportablebarcompany.com

Visit us at

www.theportablebarcompany.com

