





# Flash Bar Glass Rinser System Setup Guide

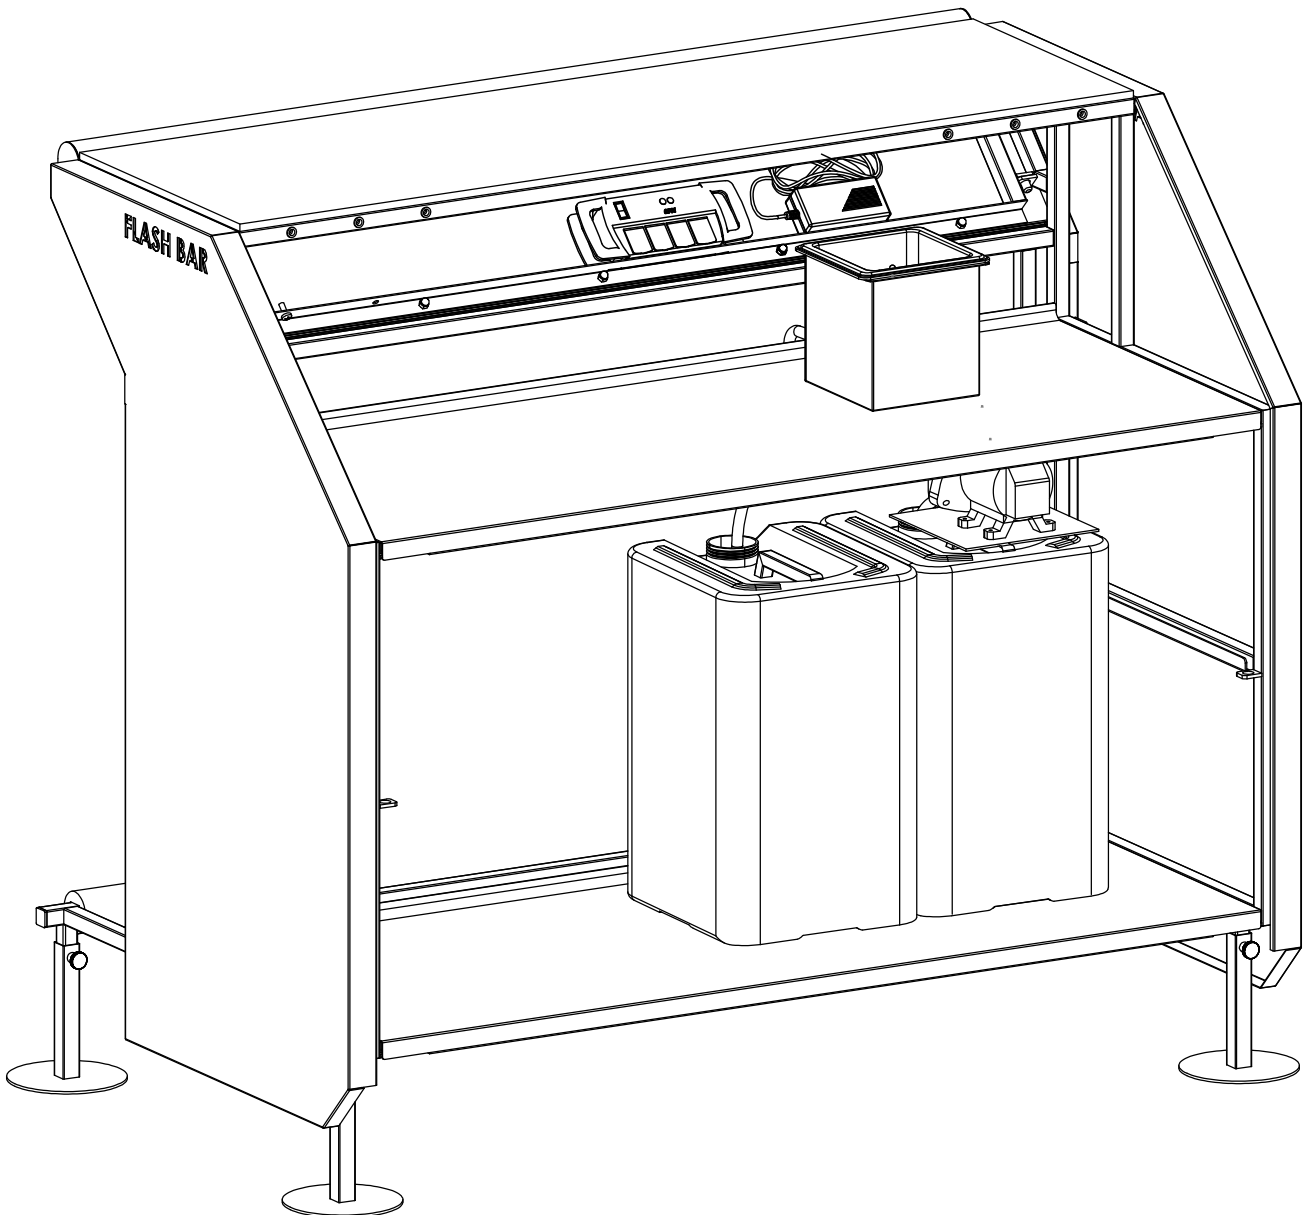

- Read all the instructions before installing.
- Remove all packing materials before you start.
- This installation requires basic mechanical skills.
- Proper installation is the responsibility of the installer
- Product failure due to improper installation is not covered under the warranty
- Keep this instruction manual.


### Required tools



Flat Screwdriver



Crescent Wrench




Teflon Tape


#### Notes:

- Flash Bar Straight Segment is required to assemble this system.


Glass Rinser  
QTY: 1



Rinser Gasket  
QTY: 1




Clean and Gray Water Tank  
QTY: 1ea

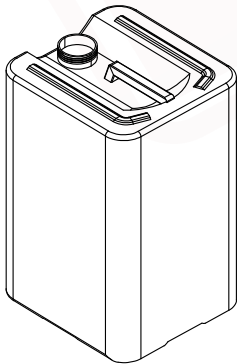


Rinser Braided and Plastic hose  
QTY: 1ea


30" Braided Hose




9/16" Plastic Hose




Rinser Base  
QTY: 1




Pump  
QTY: 1

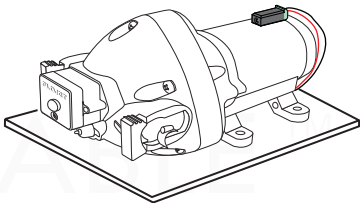


Pump adapters  
QTY: 1ea

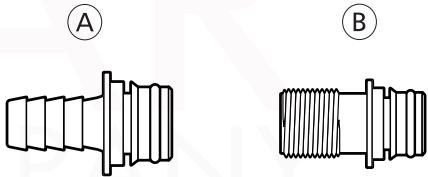

Pump 1/2" Plastic hose  
QTY: 1ea



Surge protector and Power supply  
QTY: 1ea

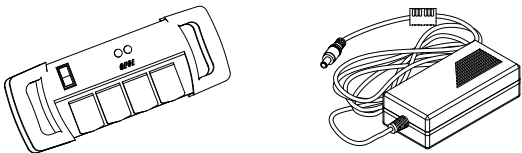

*Note: Parts are not to scale.*

**STEP 1:** Install adapter (A) to the inlet port of the pump and adapter (B) to the discharge port; first push the adapter into the pump, then fix the adapter in place pushing in the mounted blue clamps. Follow the diagrams below:

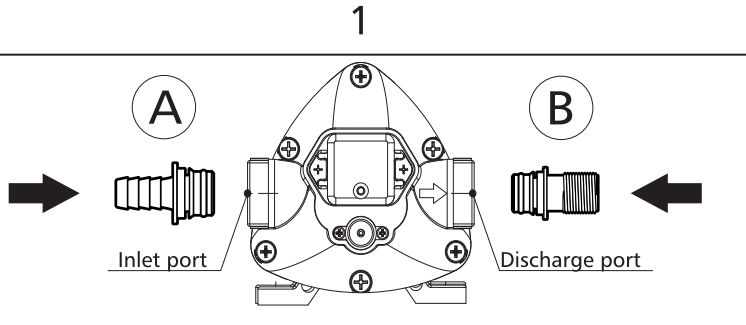


Figure 1

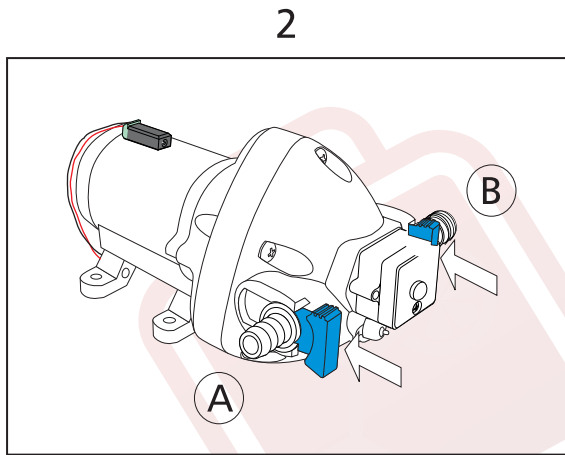


Figure 2

**STEP 2:** Slide in ice bins and position them as shown below:

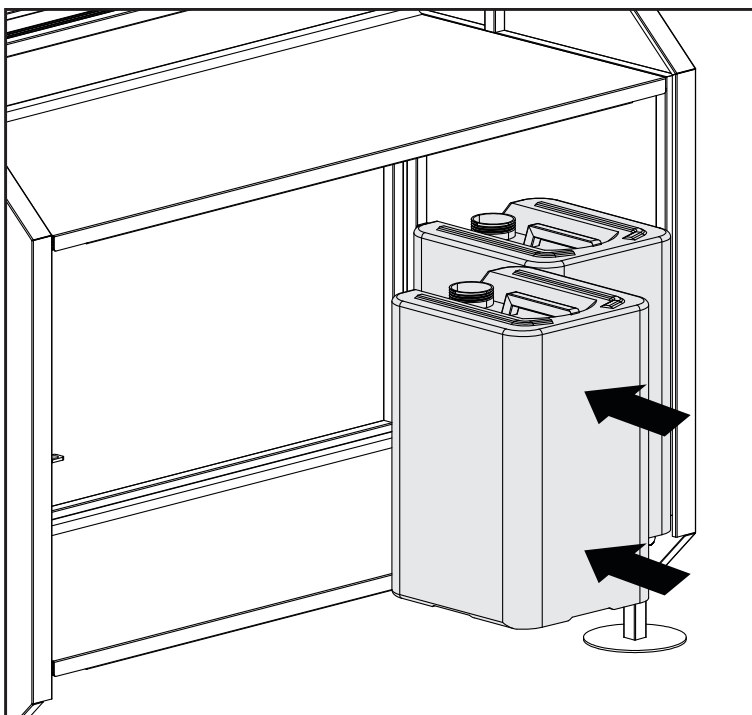


Figure 3

**STEP 3:** Detach rinser from its base.

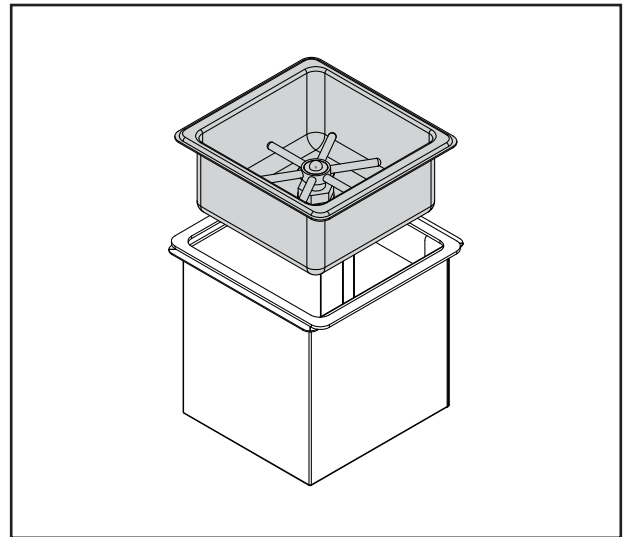


Figure 4

**STEP 4:** Install the 9/16" clear plastic hose using provided hose clamp. Then proceed to install the braided hose:

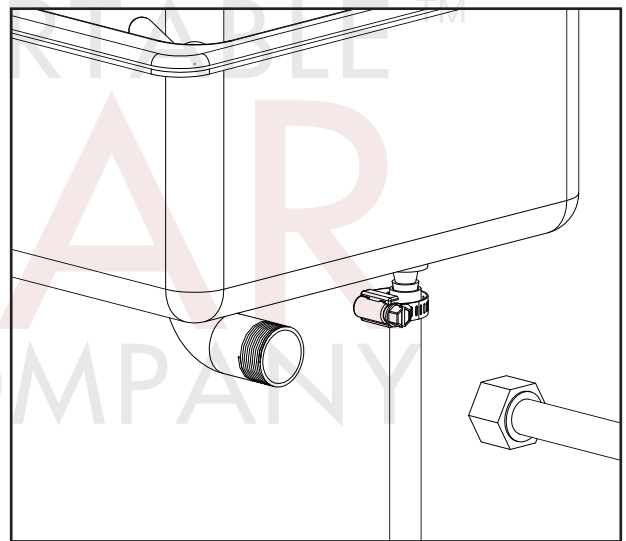


Figure 5

**STEP 5:** Put rinser back in place making sure both hoses pass through the base back opening, as shown below:

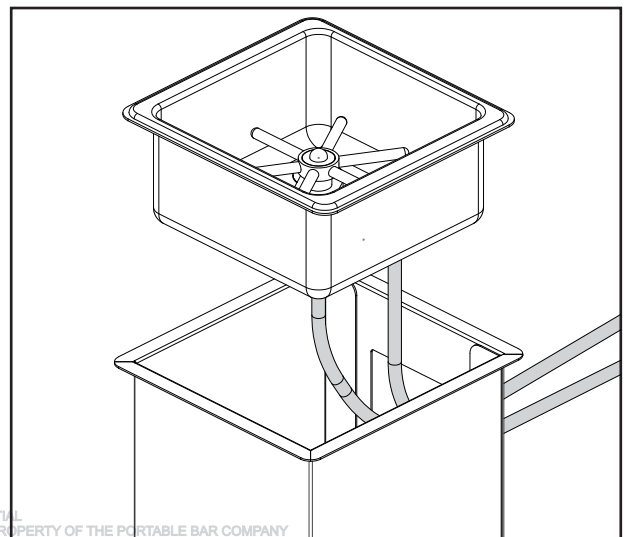


Figure 6

**STEP 6:** Set Glass Rinser on working surface passing both hoses behind the working surface into the lower shelf. Insert the clear plastic hose in the Gray Water tank's opening, as shown below:

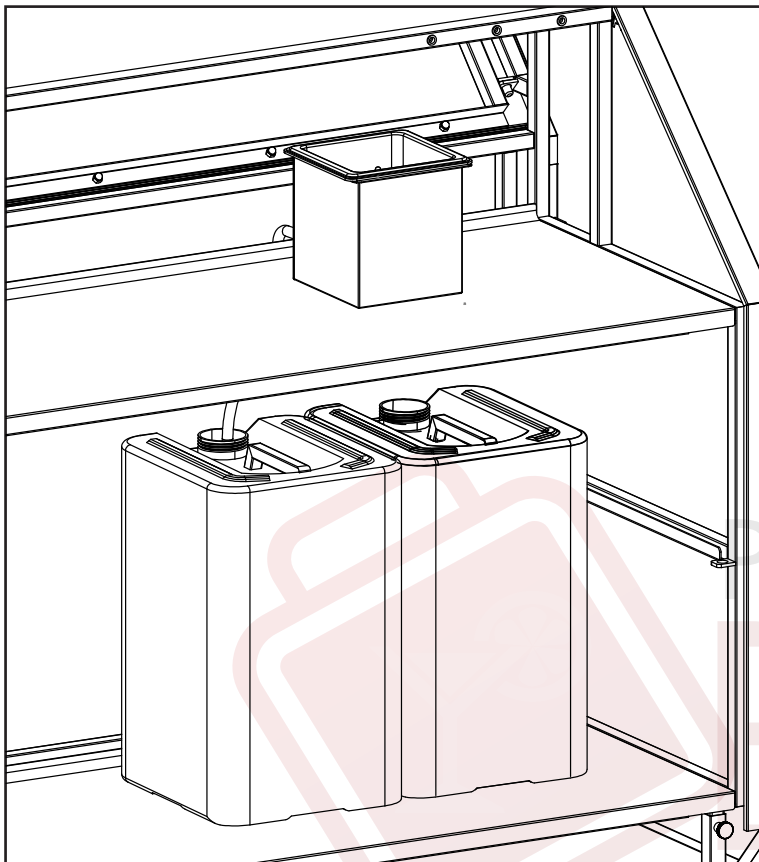


Figure 7

**STEP 7:** Install the short clear plastic hose in the pump's inlet port using a hose clamp. Then take the braided hose coming from the glass rinser and plug it into the pump's Discharge port.

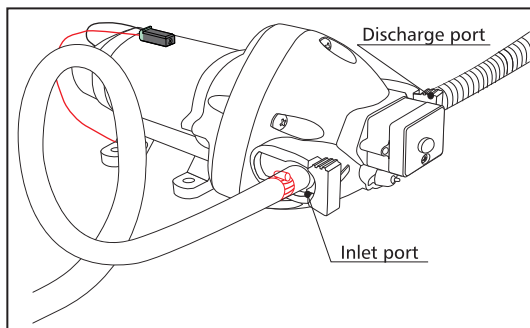


Figure 8

**STEP 8:** Rest pump on the Clear Water Tank and insert the inlet hose into the tank's opening.



Figure 9

**STEP 9:** Rest the surge protector and power supply as shown below. Plug the power supply to the surge protector and Run the power adapter cable from behind the working surface and plug it into the pump's power plug.

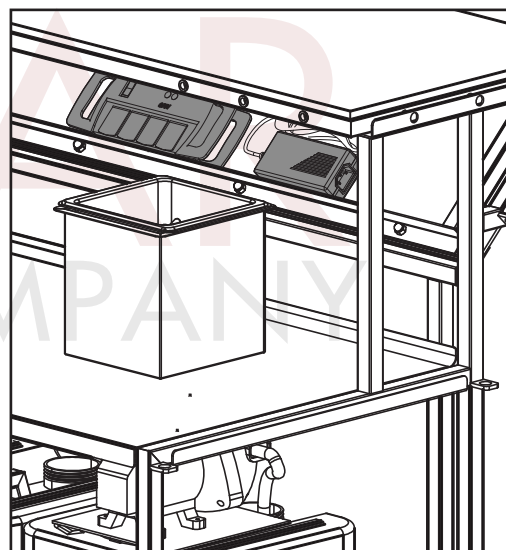


Figure 10

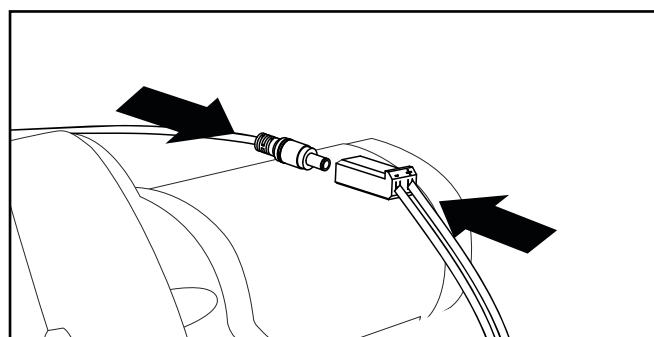


Figure 11

**Do not plug the power supply to the wall.  
Pump will activate when plugged in.  
There is no on/off switch.**

## Before turning the system on

- Make sure all the fittings, hoses and cables are properly plugged and/or sealed.
- Double read this guide if necessary.
- Read the maintenance and care guide as well as the pump manufacturer's guide.

## Operating the system

### To turn it on

1. Fill the clean water tank.
2. Connect the surge protector to a wall plug.
3. Press down the glass rinser using a glass until you see water come out.

### To turn it off


1. Turn off surge protector or disconnect it from wall plug.
2. Press down the glass rinser using a glass until all water inside the hose comes out.

### Recommendations

- Always keep water inside the the clean water tank, this is critical for the system to work properly.
- The hoses could keep water inside of them after every use.
- The pump is capable of running dry for a couple minutes. Serious damage could occur if it runs dry for long periods of time.
- When disassembling the system there will always be water left in the hoses. Have a towel handy as you are taking apart.


**CAUTION:**The Portable Bar Company IS NOT liable for any injury caused by misuse, spills, accidents nor by improper installations, alterations, or repairs. Please use the system with caution only.

# Flash Bar Sink System Glass Rinser Add-on

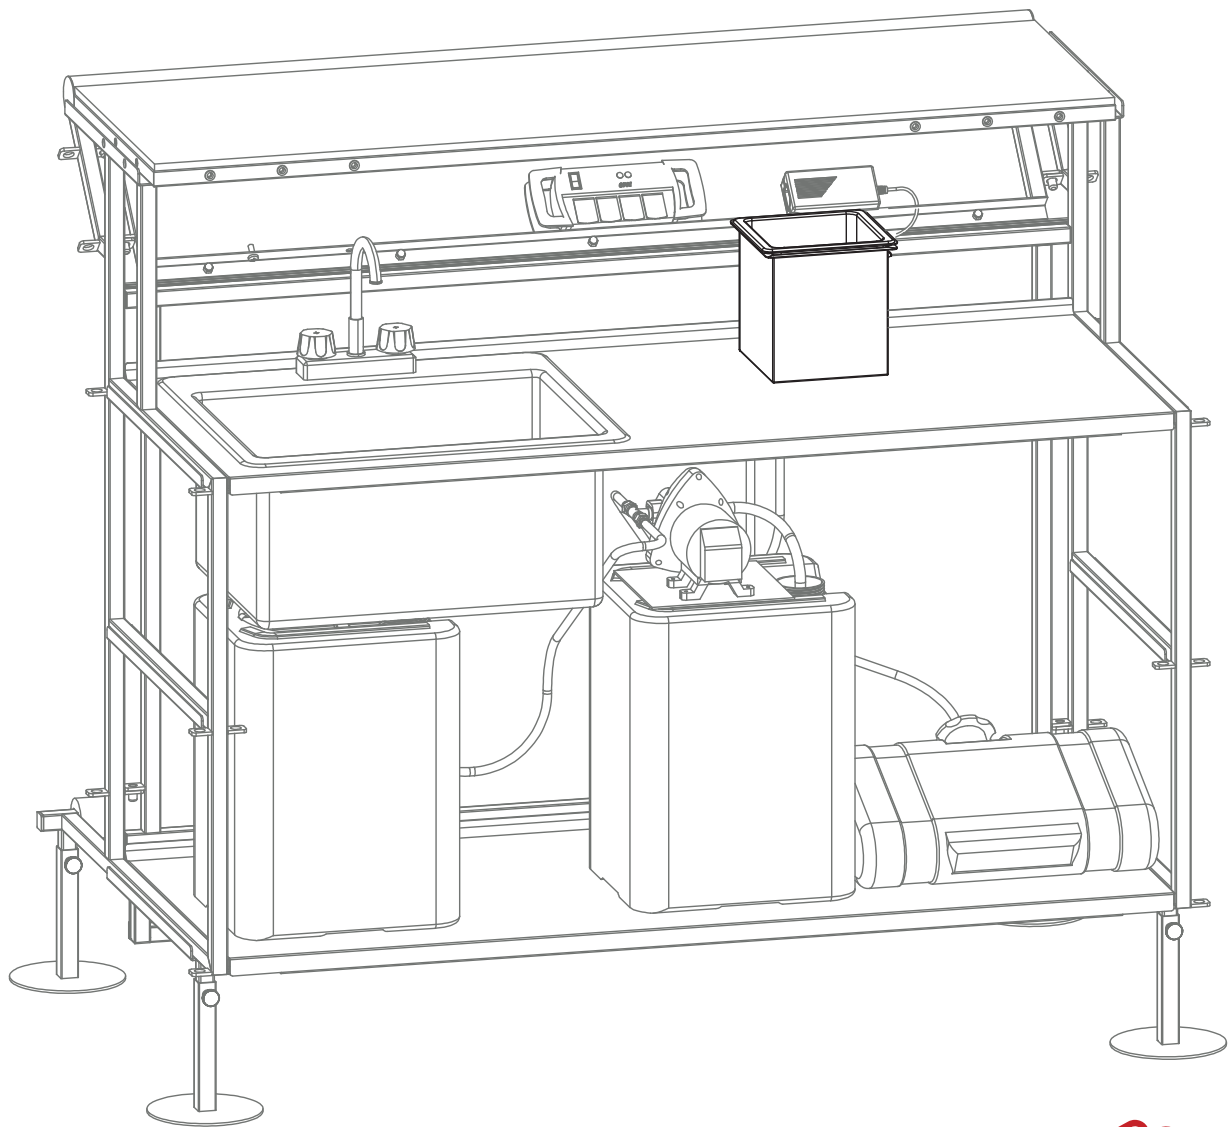


## PART LIST


**Glass Rinser**  
QTY: 1




**Gasket**  
QTY: 1




**Gray Water Tank**  
QTY: 1

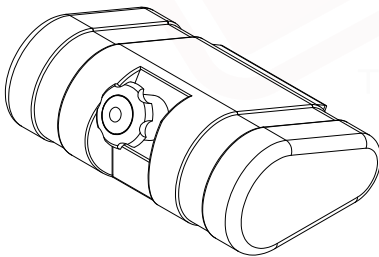


**Splitter**  
QTY: 1





**Rinser Base**  
QTY: 1



**Braided Hose**  
QTY: 1



**Clear Plastic Hose and Clamp**  
QTY: 1ea



**Coupler**  
QTY: 2



*Note: Parts are not to scale.*

*Note: Start installation by following the setup steps for the Flash Bar Sink Setup Guide. Return to this guide when indicated by the guide.*

**STEP 1:** Connect both couplers and pump adapter to splitter, as shown below. Use as much teflon tape as needed.

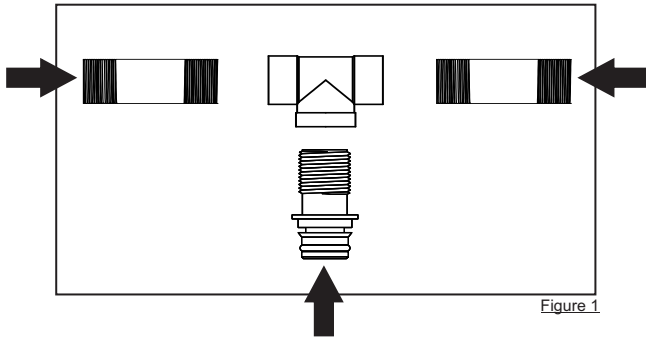


Figure 1

**STEP 2:** Connect both; the provided braided hose and the included one from your Flash Bar Sink System to the splitter. Plug splitter into the discharge port of your Sink System pump.

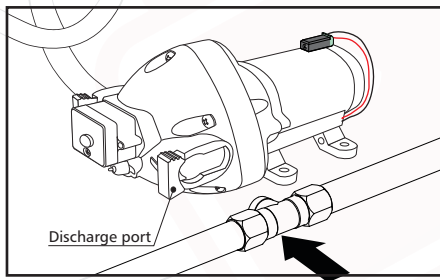


Figure 2

**STEP 3:** Remove rinser from its base.

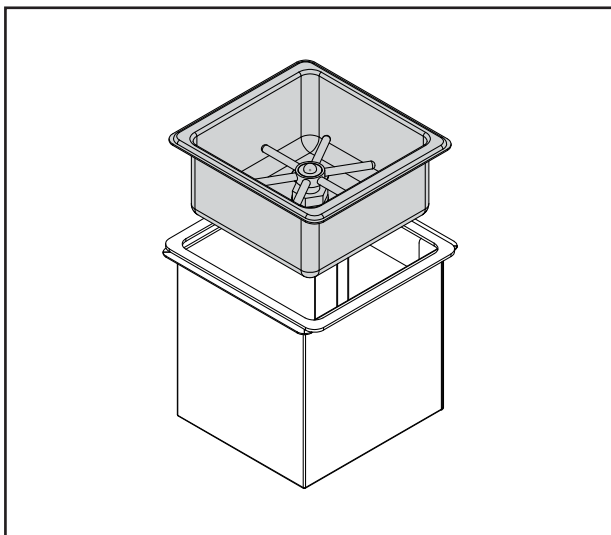


Figure 3

**STEP 4:** Install clear plastic hose using provided hose clamp. Make sure to tighten well. Then install braided hose connected to pump splitter. Use as much teflon tape as needed.

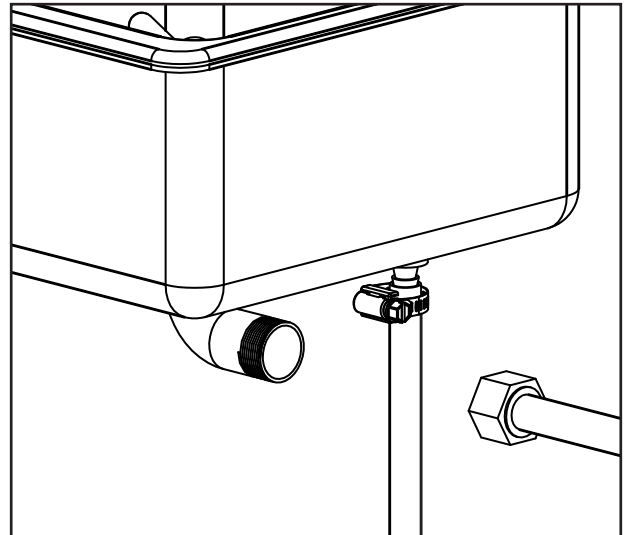


Figure 4

**STEP 5:** Place rinser on top of its base. Make sure that both hoses pass through the base back opening.

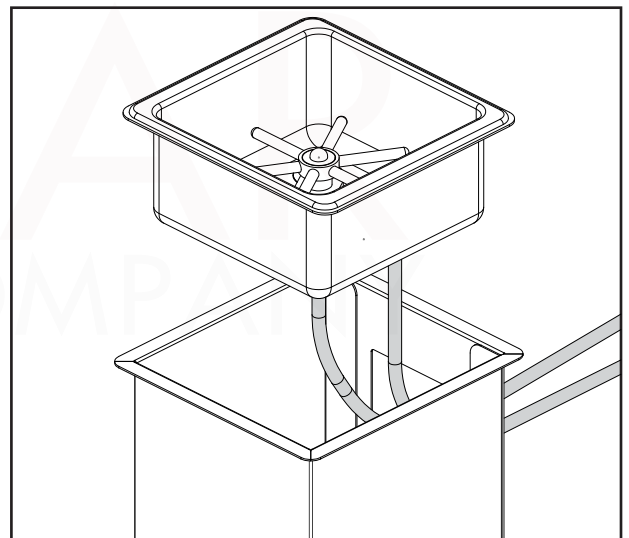


Figure 5

**STEP 6:** Pass both hoses behind the working surface.

**STEP 7:** Plug both braided hoses - the one coming from the faucet and the one coming from the rinser - to the pump's splitter.

**STEP 8:** Slide in clean and gray water tanks and position them as shown below. Rest pump on the clean water tank.

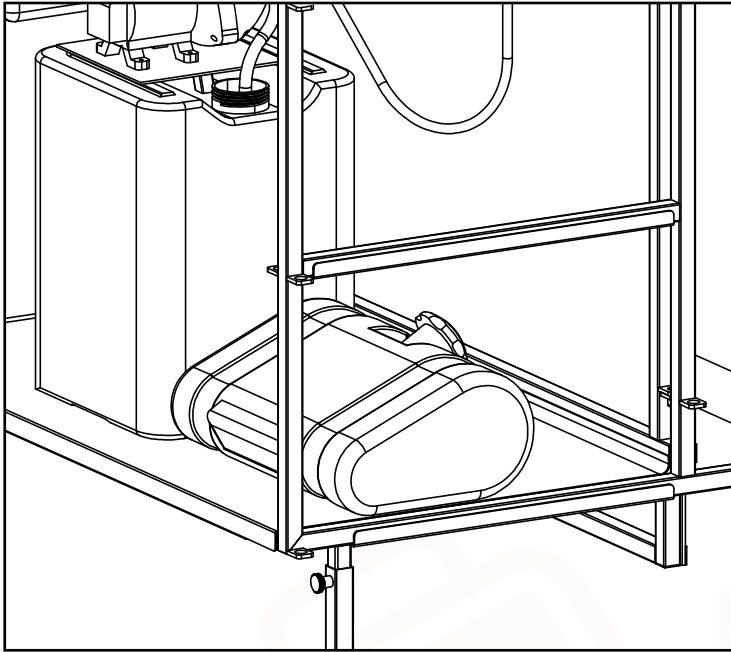


Figure 6

**STEP 9:** Insert clear plastic hose in gray water tank, as shown.

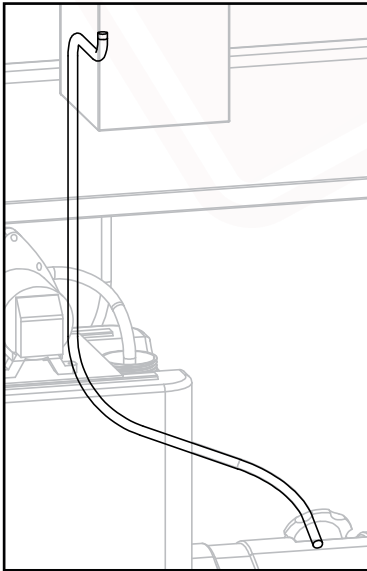


Figure 7

*Note: Please return to Page 8, STEP 8 of the Flash Bar Sink System Setup guide to complete the installation.*

## Operating your rinsers

### To turn it on

1. Fill the clean water tank.
2. Turn on faucet.
3. Power on system by turning the GFCI strip power switch to the on position.
4. Press down on rinsers using a glass.
5. Wait for water to come out of both faucet and rinsers.
6. Turn faucet off and rinsers off. You may start using your system as usual.

### To turn it off

1. Turn faucet on.
2. Press down rinsers using a glass.
2. Power off system by turning the GFCI switch to the off position.
3. Keep pressing down on rinsers until no water comes out.



**Contact us**

**Tel #** 877-958-7901

**Fax #** 866-659-3353

**E-mail:** [info@theportablebarcompany.com](mailto:info@theportablebarcompany.com)

**Visit us at**

**[www.theportablebarcompany.com](http://www.theportablebarcompany.com)**

